



spectrum

OUTDOOR LCD SERIES

www.spectrum-sz.com
www.spectrum.vip

OUTDOOR KIOSK SERIES



Parameters	32 Inch	43 Inch	55 Inch	65 Inch	75 Inch	86 Inch	
Resolution	1080x1920		2160x3840				
Frame	Power Coated Steel Frame / Heat Treated Glass / Custom Colors and Finishes Available						
Display Area (mm)	393x698	530x942	680x1210	803x1428	900x1600	1066x1895	
Aspect Ratio	9:16						
Brightness (nits)	2500			3000			
Color	1.67M						
Viewing Angle	178°						
Contrast Ratio	4000:1						
AV Inputs	Video		HDMI, USB				
Max. Power	800		1000		1200		
Consumption (W)	800		1000		1200		
Input Voltage	AC110~240V (50~60Hz)						
Reference Physical Data	Unit Size (LxWxH)	600x180x1700	800x232x1800	904x272x1940	1000x390x1980	1246x256x2350	1248x380x2057
Net Weight (Kg)	176	220	300	350	380	420	
Operating Temperature	-20°C~+60°C						
Operating Humidity	10%~80%						
Storage Humidity	5%~90%						
Enclosure Protection	IP65						
Internal Media Player	Operating System		Customisable				
Included	AC Power Cable, Remote Control						
Optional Accessories	Touch Screen Upgrade, Network Upgrade, Camera, Speakers, Dynamic Cooling System, Automatic Brightness Sensor						

OUTDOOR WALL-MOUNTED SERIES



Parameters	32 Inch	43 Inch	55 Inch	65 Inch	75 Inch	86 Inch	
Resolution	1080x1920		2160x3840				
Frame	Power Coated Steel Frame / Heat Treated Glass / Custom Colors and Finishes Available						
Display Area (mm)	393x698	530x942	680x1210	803x1428	900x1600	1066x1895	
Aspect Ratio	9:16						
Brightness (nits)	2500			3000			
Color	1.67M						
Viewing Angle	178°						
Contrast Ratio	4000:1						
AV Inputs	Video		HDMI, USB				
Max. Power	800		1000		1200		
Consumption (W)	800		1000		1200		
Input Voltage	AC110~240V (50~60Hz)						
Reference Physical Data	Unit Size (LxWxH)	600x180x1700	800x232x1800	904x272x1940	1000x390x1980	1246x256x2350	1248x380x2057
Net Weight (Kg)	120	140	160	205	250	290	
Operating Temperature	-20°C~+60°C						
Operating Humidity	10%~80%						
Storage Humidity	5%~90%						
Enclosure Protection	IP65						
Internal Media Player	Operating System Customisable						
Included	AC Power Cable, Remote Control						
Optional Accessories	Touch Screen Upgrade, Network Upgrade, Camera, Speakers, Dynamic Cooling System, Automatic Brightness Sensor						



APPLICATION:


Shopping mall
Stadium

Scenic Spot
Exhibition

Plaza
Bus Station

Museum
Gas Station

PRODUCT FEATURES:

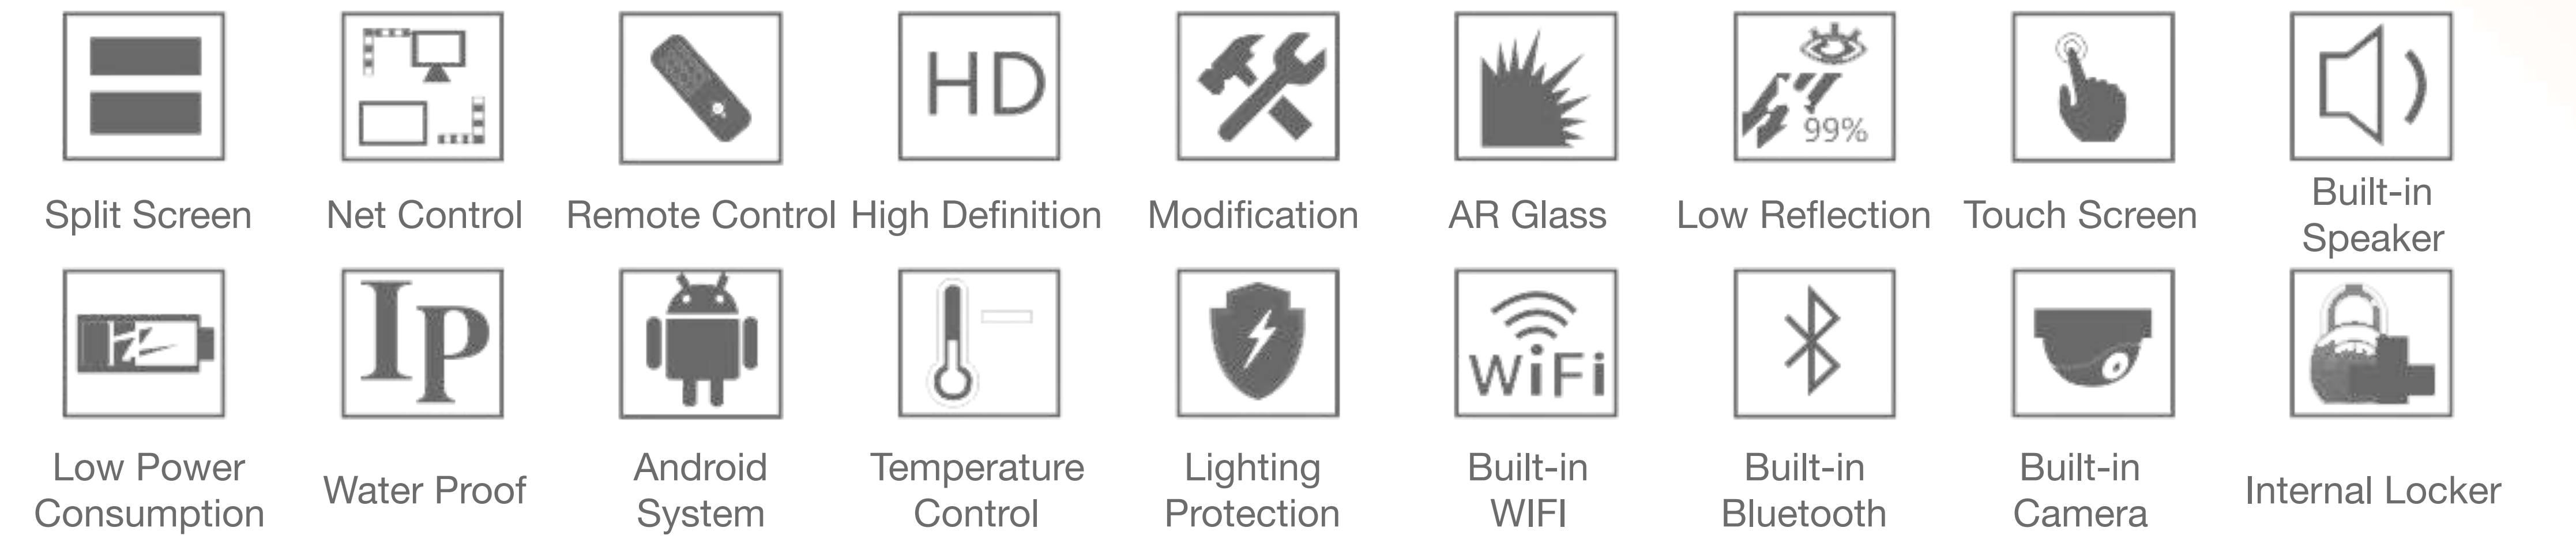

- Ultra-High Brightness Panel: The display produce a perfect image in all condition with 2500~3000nits brightness.
- Water Proof: Rated IP65 to ensure perfect performance in any weather condition.
- Dust/Moisture Proof: Prevent the screen from dust, haze and high humidity.
- Anti-Reflective Glass or Anti-Glare Glass: The glass diffuses direct sunlight to provide an uninterrupted viewing experience.
- Ambient Light Sensor: The display adjusts the viewing brightness according to the environment brightness.
- Advanced Temperature Control: 24/7 intelligent temperature control system and cooling system ensuring the device keeping the performance of the display at a peak level.
- Internal Locker: Secure internal locker for storage of external devices connected via HDMI and USB.
- Time Switch: Micro computer maintains the automatic time switch.
- Lighting Protection System and Residual Current Circuit-breakers
- NEC Remote: Convenient to control the devices.
- Cloud Background Control: Maintain all of the devices via WiFi at the same time.
- Sturdy Enclosure: The high quality materials of enclosure provides the internal components protection from any external threats.
- Modifications: The screens can be upgraded in various ways including the addition of a camera, speakers, 4G module, customized colors, media players etc.

CERTIFICATION:

